

## Product Data Sheet



# HB-413 SYNTHETIC-CHAIN

## High Temperature Food Grade Chain Lubricant

### DESCRIPTION:

**HB-413 Synthetic Chain HT FG Chain Lubricant** is specifically formulated for use in high-temperature applications. Its exceptional resistance against smoking and carbon buildup makes it the ideal lubricant for high-temperature baking operations.

**HB-413 Synthetic Chain HT FG Chain Lubricant** meets H1 requirements for applications with incidental food contact and fully complies with the requirements of 21 CFR 178.3570.

### BENEFITS:

Food-grade formulation. Ideal for high-temperature ovens (e.g., tortilla ovens) and has USDA Authorization. This product is H1 & resists smoking with excellent carbon and varnish control. It also has excellent rust, corrosion control and oxidative stability. Premium product with High viscosity index, very high flash and auto-ignition points for added safety. Low volatility, quality film strength and anti-wear properties, Non-toxic/non-hazardous.

#### H & B Industries, Inc.

9758 Abernathy  
Dallas, TX. 75220  
(214) 350-1984  
[info@hbind.com](mailto:info@hbind.com)  
Website [www.hbind.com](http://www.hbind.com)

#### H & B Industries, Inc

301 Crickett Lane  
Temple, TX. 76501  
(254) 985-2525  
[hbsupply@hbind.com](mailto:hbsupply@hbind.com)  
Website [www.hbind.com](http://www.hbind.com)

# Product Data Sheet

## TYPICAL PROPERTIES

Viscosity Index 150

Viscosity, cSt @40°C 220 @ 100 °C 26

Flash Point °F (°C) 424 °F (218°C)


FZG Test (failure stage) 12+

Copper Corrosion 1A

24hr Rust Test PASS

Distilled Water PASSED

Sea Water PASS

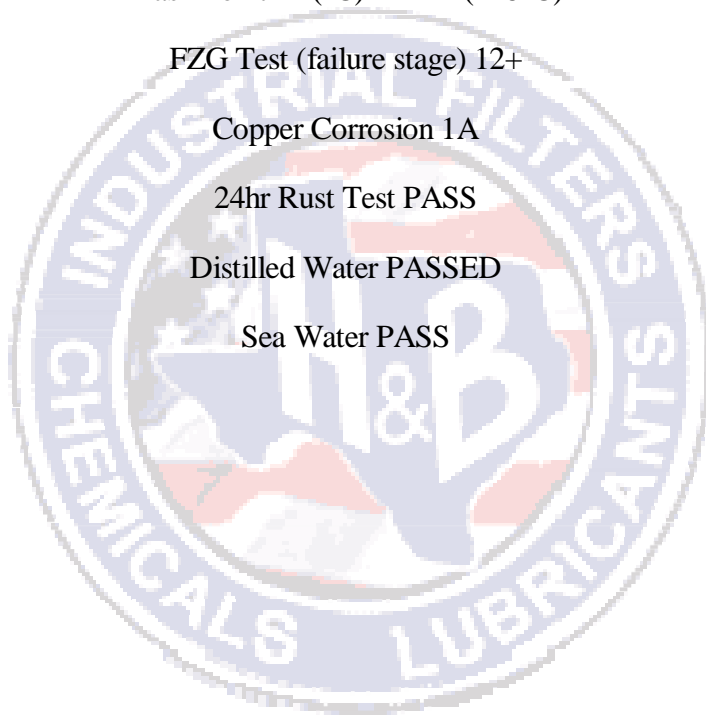

### **H & B Industries, Inc.**

9758 Abernathy  
Dallas, TX. 75220  
(214) 350-1984  
[info@hbind.com](mailto:info@hbind.com)  
Website [www.hbind.com](http://www.hbind.com)

### **H & B Industries, Inc**

301 Crickett Lane  
Temple, TX. 76501  
(254) 985-2525  
[hbsupply@hbind.com](mailto:hbsupply@hbind.com)  
Website [www.hbind.com](http://www.hbind.com)