

## Product Data Sheet



# HB-1106 FLEETLUBE 15W40 CK4

## Synthetic Blend Heavy Duty Motor Oil

### DESCRIPTION:

**HB-1106 15W40 CK4 SYNTHETIC BLEND HDMO** (Heavy Duty Motor Oil) is the most current formulated heavy duty motor oil for all-season use in highway commercial diesel engines, including EGR equipped engine emission controlled systems. This product is manufactured from selected premium quality base stocks with additive technology to provide engine protection for current EPA exhaust particulate emissions standards using Ultra-Low Sulfur Diesel (ULSD). This product meets performance requirements for all naturally aspirated, turbocharged and supercharged, diesel engines as well as all four- cycle gasoline engines. This product reflects test improvements in reducing aeration, better oxidation stability, enhanced soot control, and advanced wear protection.

**HB-1106 15W40 CK4 SYNTHETIC BLEND HDMO** (Heavy Duty Motor Oil) meets API current service classifications CH-4, CI-4, CI-4 Plus, and CJ-4, and CK-4 and ACEA European Oil Sequences Section E-7-12 & E-9-12. The product satisfies the following engine manufacturer requirements: Mack EO-0 Premium Plus, Mack EOS-4.5, Renault VI RLD-3, Renault VI RLD-4, Caterpillar ECF-3, Cummins CES 20081, Cummins CES 20086, Detroit Diesel DDC93K218, Detroit Diesel DDC93K222, JASO DH-2, MB-228.31, MAN M3575, MTU 2.1, Deutz DQC III-10 LA, Ford WSS-M2C171-E, Ford WSS-M2C171-F1 Volvo VDS-4, and Volvo VDS-4.5.

### APPLICATIONS:

Recommended for all major diesel and mixed fleet (diesel/four-cycle gasoline) engine operations in all service and under all operating conditions where the equipment owner specifies the additional performance benefits of multigrade oils. This product is preferable for newer diesel engines with EGR systems and those equipped with Diesel Particulate Filter (DPF) and Diesel Oxidation Catalyst (DOC) technologies.

#### H & B Industries, Inc.

9758 Abernathy  
Dallas, TX. 75220  
(214) 350-1984  
[info@hbind.com](mailto:info@hbind.com)  
Website [www.hbind.com](http://www.hbind.com)


#### H & B Industries, Inc

301 Crickett Lane  
Temple, TX. 76501  
(254) 985-2525  
[hbsupply@hbind.com](mailto:hbsupply@hbind.com)  
Website [www.hbind.com](http://www.hbind.com)

## Product Data Sheet

### Typical Properties

SAE Grade, Automotive	15W-40
Viscosity, cSt	
At 40° C	115
At 100° C	15.4
Viscosity Index	140
Viscosity, CCS, D-5293, -20°C/cP	6000
Flash Point, (COC), °C/°F	238/460
Pour Point, °C/°F	-34/-30
Sulfated Ash, % wt	1.0
Neutralization No., TBN-E	8.5
HTHS, Vis/cP, D-468	4.4
Gravity, API @ 60° F	30.5

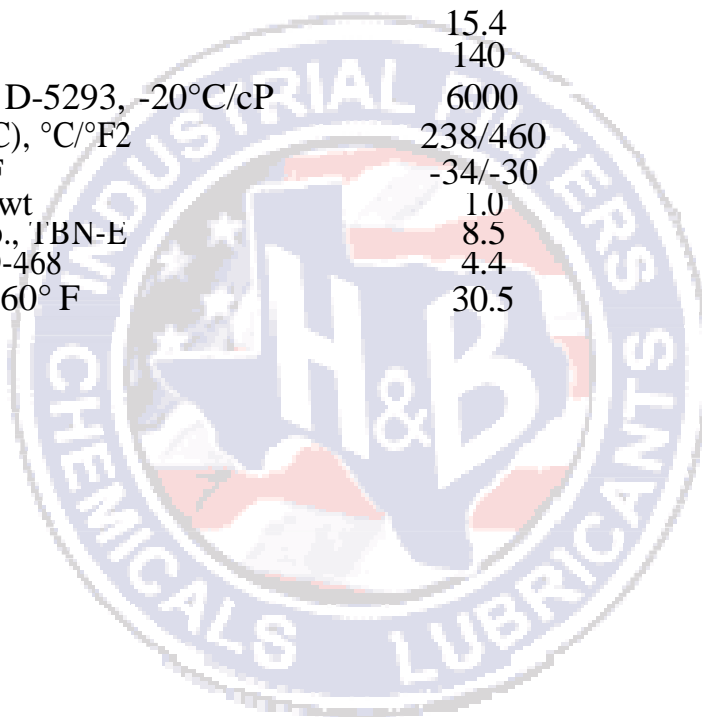

#### **H & B Industries, Inc.**

9758 Abernathy  
Dallas, TX. 75220  
(214) 350-1984  
[info@hbind.com](mailto:info@hbind.com)  
Website [www.hbind.com](http://www.hbind.com)

#### **H & B Industries, Inc**

301 Crickett Lane  
Temple, TX. 76501  
(254) 985-2525  
[hbsupply@hbind.com](mailto:hbsupply@hbind.com)  
Website [www.hbind.com](http://www.hbind.com)